

EclPanel TWCJR

370W Tunable White and colourful LED soft light with pixels and lighting effects (driven @ 220W)

ORDER CODE: **ECLPANELTWCJR**



370W RGB + Warm White LEDs (driven @220W)



CRI > 94
R9 > 88,8
TLCI > 92



4 section pixel control and built-in lighting effects for cinema applications



Silent operation with multiple fan modes



Battery connection (4pXLR 24-36V): compatible with industry standard external batteries (optional)

EclPanel TWCJR, is the compact 1x1 LED soft light that provides a beautiful, wide source of soft and precise colours. In addition to this, the PROLIGHTS **EclPanel TWCJR** comes with a full range of white reproductions, from daylight through to tungsten tones, reaching a superior light quality with high CRI, TLCI and TM-30.

The **EclPanel TWCJR** allows for quick and accurate local adjustment of light through 3 rotatory knobs with three fully featured modes: CCT with +/- green shift, HSI for total control of hue, saturation and intensity, FX mode to access the on board pixel cinema effects. The unit can also be controlled on a per-section basis, allowing for reproduction of onboard customisable effects or to be self-made through the lighting desk. Both methods provide eye-candy, with the appealing and modern front looks and cinematic special effects.

The unit is designed with an onboard driver and built-in power supply and, being lightweight, the **EclPanel TWCJR** offers easy rigging and cabling making it the perfect lighting tool for every location.

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 370W RGB + Warm White LEDs (driven @ 220W)
- Luminous flux: 17'109lm @4.000 K with LD filter
- Lux: @4000K, 265lx @5 m
- CRI: 90 @3.200 K; 94 @5.600 K
- R9: 84,1 @3.200 K; 88,8 @5.600 K
- TLCI: 92 @5.600 K
- TM30 Rf: 90 @3.200 K; 89,4 @5.600 K
- TM30 Rg: 105 @3.200 K; 104 @5.600 K
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: 102°
- Field angle: 158°
- Lens type: medium density diffusion panel (interchangeable)
- Additional optics: see available accessories

COLOUR SYSTEM

- Colour mixing: RGB + Warm White
- CCT: CCT control, + / - green correction, tungsten emulation
- White presets: 2.800 K - 10.000K with 28 K resolution
- Colour wheel: virtual colour wheel with macros

DYNAMIC EFFECTS

- Control Resolution: 16bit dimmer, colours
- Pixel patterns: pre-programmed pixel macros and cinema lighting effects patterns
- Special features: linear crossfade channel from any white to any colour; virtual CTO on colours

BODY

- Body: sturdy die-cast aluminium body
- Body colour: black

CONTROL

- Protocols: DMX512, RDM, W-DMX, rotatory knob
- Stand Alone: selectable mode through 3 rotatory knobs
- Pixel control: 4 section control
- W-DMX: included, wireless solution receiver
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Display battery: self-charging battery backup
- Operating temperature: -20° ~ +45°
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 40.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Low Voltage DC mains: 24-36V
- Max power consumption: 230W
- Power factor: >0,97

PHYSICAL

- IP rating: 20
- Cooling: active, silent operation
- Suspension and fixing: bracket for hanging and positioning
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Neutrik powerCON TRUE1 IN/OUT connectors
- Low Voltage DC connector: XLR 4p
- Dimensions (WxHxD): 529x430x144 mm / (with PO system) 546x430x144mm
- Weight: 10,5 kg / (with PO system) 11,8kg




EclPanel TWC Jr

PHOTOMETRICS

PRESET 4.000 K (FILTER HD)

Beam angle 50%: 111°

Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111°	161,3°	177°	76,4%	52,2%

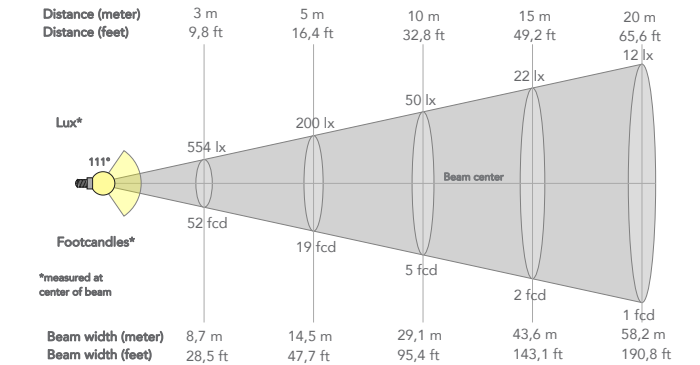


BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	4990lx	1248lx	554lx	312lx	200lx	89lx	50lx	22lx	12lx	8lx	6lx	3lx	2lx
Footcand.	464fcd	116fcd	52fcd	29fcd	19fcd	8fcd	5fcd	2fcd	1fcd	1fcd	0fcd	0fcd	0fcd
Beam wid.	2,9m	5,8m	8,7m	11,6m	14,5m	21,8m	29,1m	43,6m	58,2m	72,7m	87,3m	116,3m	145,4m
Beam wid.	9,6ft	19,2ft	28,5ft	38,1ft	47,7ft	71,6ft	95,4ft	143,1ft	190,8ft	238,5ft	286,2ft	381,6ft	477ft

PRESET 4.000 K (FILTER LD)

Beam angle 50%: 102°

Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
101,5°	155,8°	176°	80,7%	57,1%

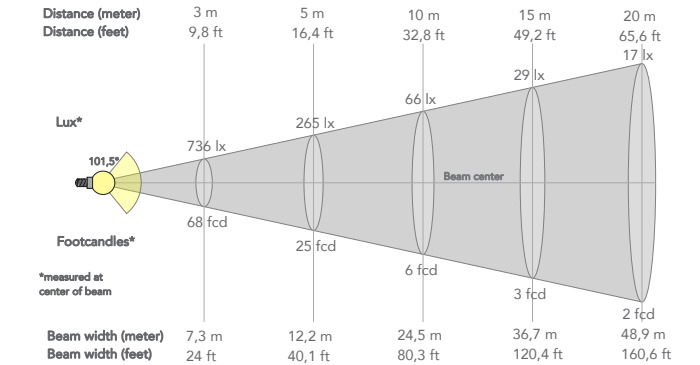


BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	6627lx	1657lx	736lx	414lx	265lx	118lx	66lx	29lx	17lx	11lx	7lx	4lx	3lx
Footcand.	616fcd	154fcd	68fcd	38fcd	25fcd	11fcd	6fcd	3fcd	2fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	2,4m	4,9m	7,3m	9,8m	12,2m	18,4m	24,5m	36,7m	48,9m	61,2m	73,4m	97,9m	122,4m
Beam wid.	8,1ft	16,2ft	24ft	32,1ft	40,1ft	60,2ft	80,3ft	120,4ft	160,6ft	200,7ft	240,8ft	321,1ft	401,4ft

PRESET 4.000 K (FILTER MD)

Beam angle 50%: 102°

Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
101,9°	158,2°	177,2°	79,0%	55,3%

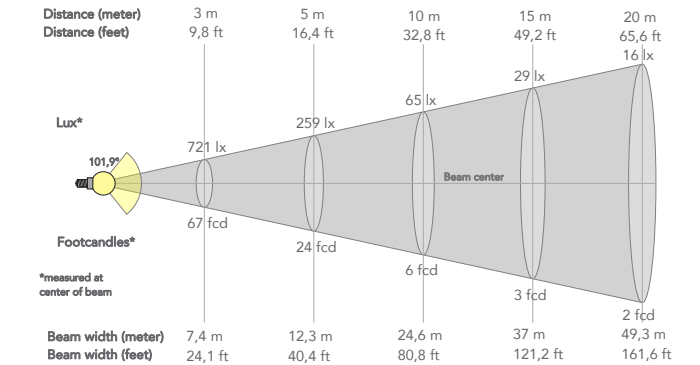


BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	6486lx	1622lx	721lx	405lx	259lx	115lx	65lx	29lx	16lx	10lx	7lx	4lx	3lx
Footcand.	603fcd	151fcd	67fcd	38fcd	24fcd	11fcd	6fcd	3fcd	2fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	2,5m	4,9m	7,4m	9,9m	12,3m	18,5m	24,6m	37m	49,3m	61,6m	73,9m	98,6m	123,2m
Beam wid.	8,1ft	16,3ft	24,1ft	32,3ft	40,4ft	60,6ft	80,8ft	121,2ft	161,6ft	202ft	242,5ft	323,3ft	404,1ft

PRESET 4.000 K (FILTER INT)

Beam angle 50%: 73°

Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
72,6°	115,6°	161°	91,8%	78,6%

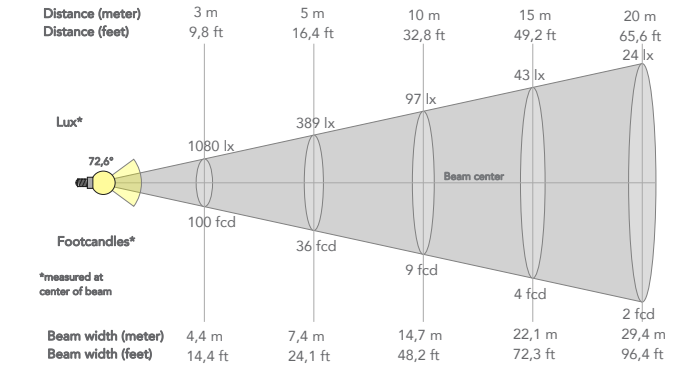

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9716lx	2429lx	1080lx	607lx	389lx	173lx	97lx	43lx	24lx	16lx	11lx	6lx	4lx
Footcand.	903fcd	226fcd	100fcd	56fcd	36fcd	16fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	1,5m	2,9m	4,4m	5,9m	7,4m	11m	14,7m	22,1m	29,4m	36,8m	44,1m	58,8m	73,5m
Beam wid.	4,9ft	9,7ft	14,4ft	19,3ft	24,1ft	36,2ft	48,2ft	72,3ft	96,4ft	120,5ft	144,7ft	192,9ft	241,1ft



EclPanel TWCJr

ACCESSORIES

ECLPANELJRPOYO




Pole operated aluminium yoke bracket for ECLPANELTWCJr

EPTWCJRBD



Barn door with 4 directional flaps to adjust the light beam

EPTWCJRFILTER
(INT-LD-MD-HD)



Front diffuser filter for ECLPANELTWCJr

EPTWCJREC30



30° egg crate for ECLPANELTWCJr

EPTWCJREC60



60° egg crate for ECLPANELTWCJr

EPTWCJREC8



8 chamber egg crate for ECLPANELTWCJr



EclPanel TWCJr

ACCESSORIES by DOP CHOICE

EPTWCJR5B11



SnapBag 1x1 for ECLPANELTWCJr

EPTWCJR5G4SB1140




40° SnapGrid for SnapBag, 1x1 for ECLPANELTWCJr

EPTWCJR5G1140



40° SnapGrid, 1x1 for ECLPANELTWCJr

EPSREM



Rabbit-Ears 1x1 MINI for ECLPANELTWCJr



EclPanel TWC

ACCESSORIES RABBIT-EARS by DOP CHOICE

EPSBRL3



Snapbag Lantern 3' for Rabbit-Ears

EPSBRL3C4




Cover for Snapbag Lantern 3' (EPSBRL3)

EPSBRO3



Snapbag Octa 3' to be mounted on Rabbit-Ears

EPSGC3W40




40° SnapGrid, to be mounted on Snap Bag Octa 3' (EPSBRO3)

EPSBRO5



Snapbag Octa 5' to be mounted on Rabbit-Ears

EPSGC5W40



40° SnapGrid, to be mounted on Snap Bag Octa 5' (EPSBRO5)

EPSBRM



SnapBag Medium to be mounted on Rabbit Ears


EPSGCM40



40° SnapGrid, to be mounted on Snap Bag Medium (EPSBRM)

EclPanel TWCJr

TECHNICAL DRAWINGS

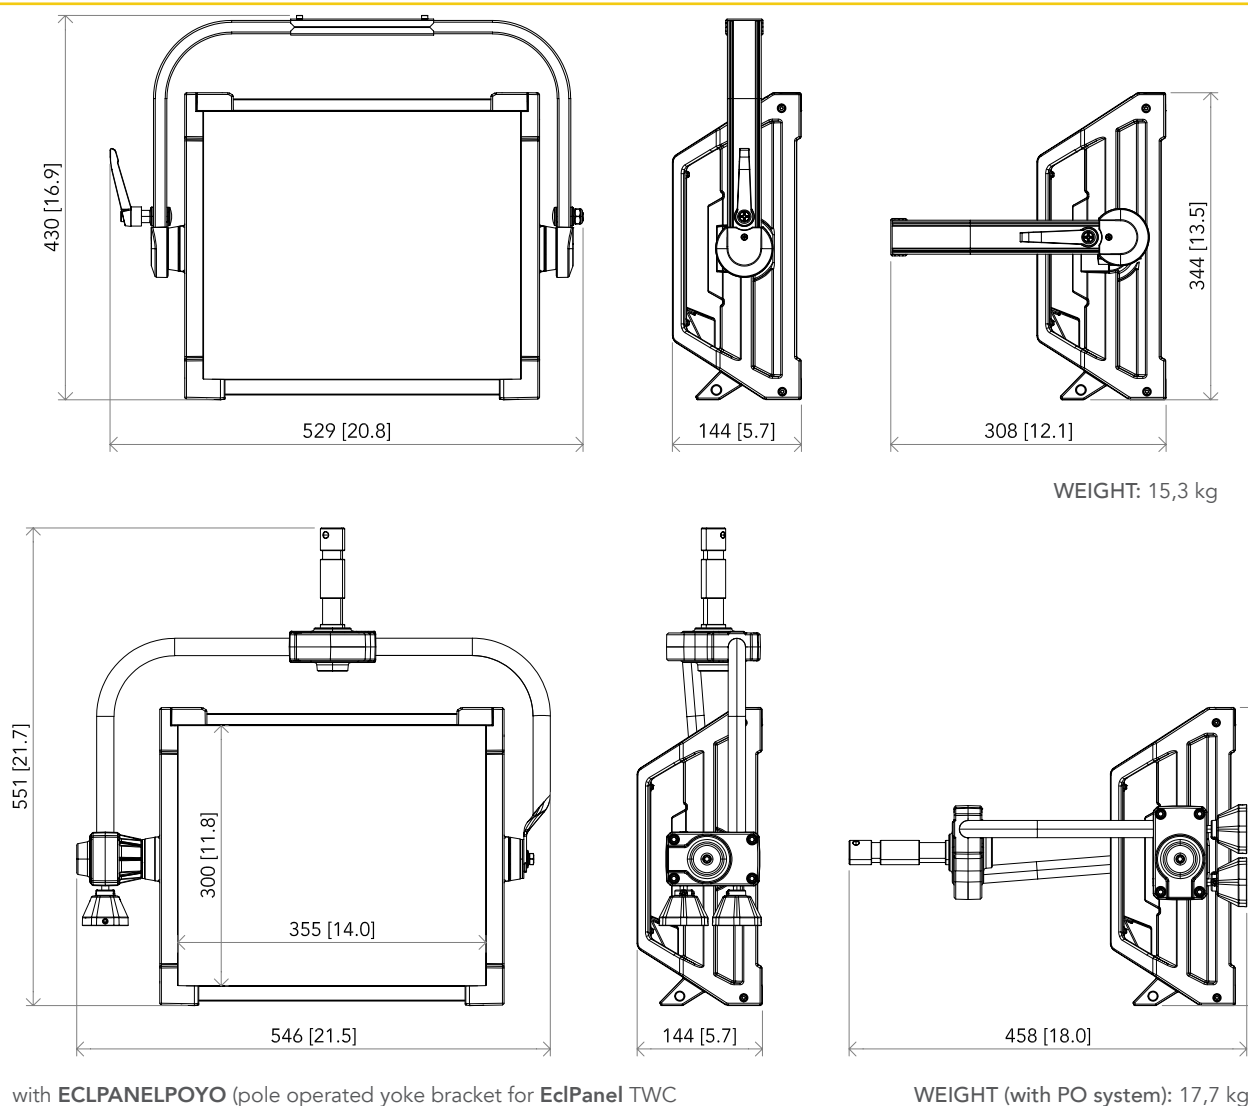

PACKAGE CONTENT

- ECLPANELTWCJR
- 1,5 meters SCHUKO - NEUTRIK POWERCON TRUE1 power cable
- EPTWCJRFILTERMD: Front medium diffusion filter for ECLPANELTWCJR
- ECLFRSPG: Spigot for PROLIGHTS Fresnel series
- User manual

Check the website
for detailed specifications
and tech documentations

