

LiveX 12A

Bi-amp loudspeaker, D+AB-cl. 500W 2-way (12" LF+1" HF), ABS box, 126dB SPL
ORDER CODE: **LIVEX12A**



Active loudspeakers, D+AB class bi-amp, 2-way 450 W+50 W, 126db SPL

MAIN FEATURES

- Low frequency: 12" Nd woofer/3"v.c.
- High frequency: 1" Nd driver/1.7"v.c.
- Frequency response: 60-18000 Hz (± 3 dB)
- User controls: mic, line, master, eq LF-HF
- Reproduction of voice and music for live and recorded performances
- Cabinet material: polypropylene, can also be used as a stage monitor
- For sound installations in environments requiring dynamics and sound pressure

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active 2 way

COMPONENTS

- Low frequency: 12" neodymium woofer / 3" v.c.
- High frequency: 1" neodymium driver / 1.4" v.c.

FEATURES

- Built-in amp LF/HF: 450+50W /4/8Ohm
- SPL max: 126dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 120/126dB @1m (free field)
- Frequency response: 60-18000Hz (± 3 dB)
- Coverage angle HxV: 80x60°
- Cross over frequency: 1500Hz

ELECTRONICS

- Amplifier: digital + AB class
- Power: 450+50W /4/8Ohm
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: limiter temp.
- User controls: mic, line, master, eq LF-HF
- Built-in DSP: 54bit - sampling rate 48kHz
- Operating voltage/frequency: 220 V~240 V/50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT, jack 6.35 mm
- Power connection: type power-con


CABINET CONSTRUCTION

- Cabinet material: 4mm polypropylene
- Suspension system: eyebolt, 35 mm pole mount
- Angle: 45° monitor applications
- Handles: 1 on side

PHYSICAL

- Dimensions (WxHxD): 416x615x356 mm
- Weight: 18 kg

TECHICAL DRAWINGS

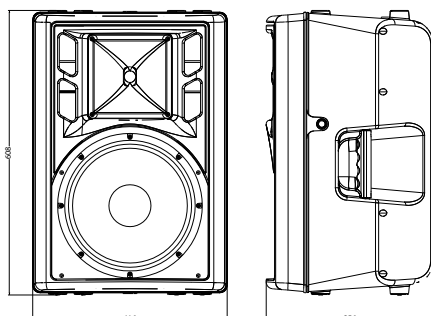

For more product
info and downloads
visit our website

