

Ark 2V8SP

2xLF8" passive subwoofer loudspeaker, 300W/8ohm, 122dB SPL



Bass reflex passive subwoofer, 400 W AES, 122dB SPL

MAIN FEATURES

- Low frequency: 2x8" woofer/2" v.c.
- Frequency response: 40-200 Hz (± 3 dB)
- ARK2V8SP subwoofer speaker is the ideal complement to column loudspeakers for reinforcing low notes.
- Signal connection between the subwoofer and medium-high column units via a connector integrated with the loudspeaker.
- The DAD logo on the grille can be rotated rapidly for the both vertically and horizontally installation.
- Birch plywood enclosure.

VERSIONS

Code	Housing
ARK2V8SPBK	Black
ARK2V8SPWH	White

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: passive subwoofer

COMPONENTS

- Low frequency: 2x8" woofer/2" v.c.

FEATURES

- AES/program power: 400/800W
- SPL max: 122dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 93dB @1W/1m (free field)
- Impedance: 8
- SPL cont/peak: 116/122dB @1m (free field)
- Frequency response: 40-200Hz (± 3 dB)
- Coverage angle HxV: omnidirectional
- Suggest LPF range: 100/160Hz
- Recommended amplifier up to: 800W

INPUT/OUTPUT CONNECTORS

- Input signal: jack 6.35 mm, NL4 IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 15mm plywood
- Suspension system: support with signal connection
- Handles: 1 top

PHYSICAL


- Dimensions (WxHxD): 260x660x365mm
- Weight: 17.1kg

ACCESSORIES & RELATED PRODUCTS


- ARK680SE Support element for ARK column array system

- BAGARK2V8 Reinforced nylon bag for the protection/transport of one piece of ARK2V8

CONFIGURATIONS AVAILABLE

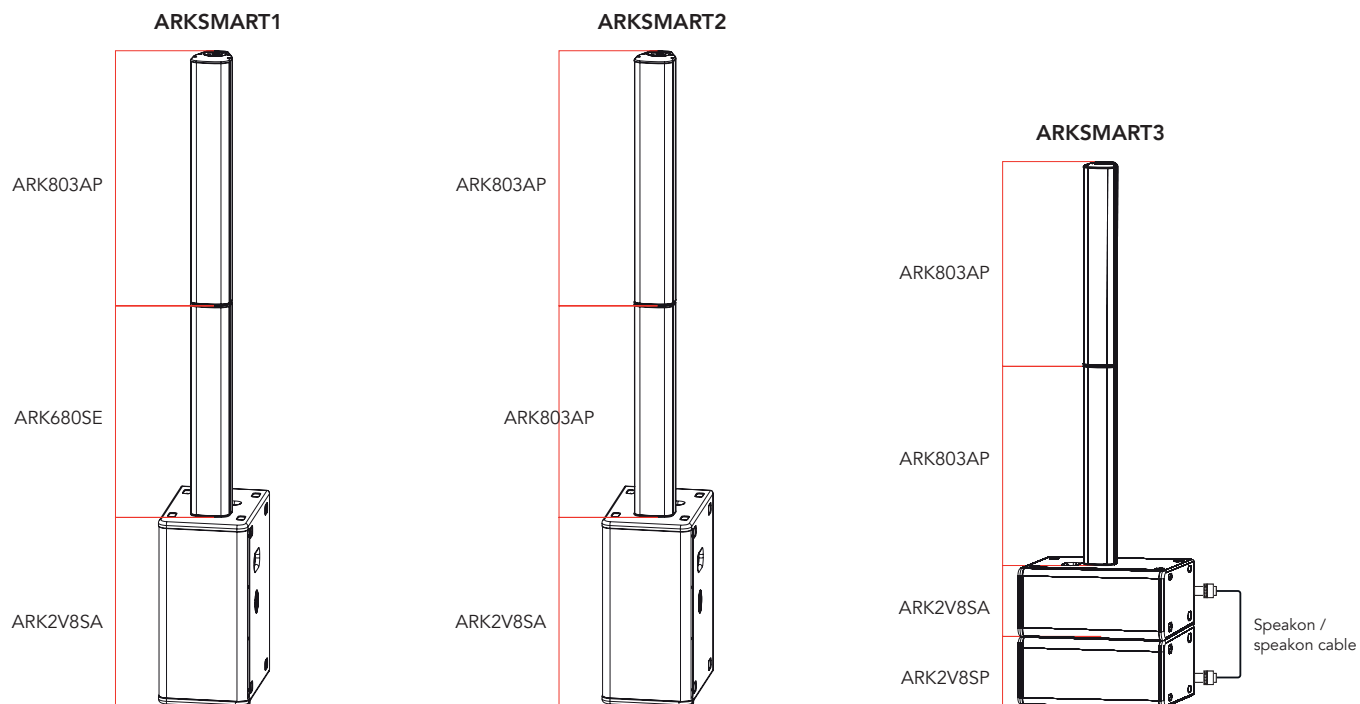

TECHICAL DRAWINGS

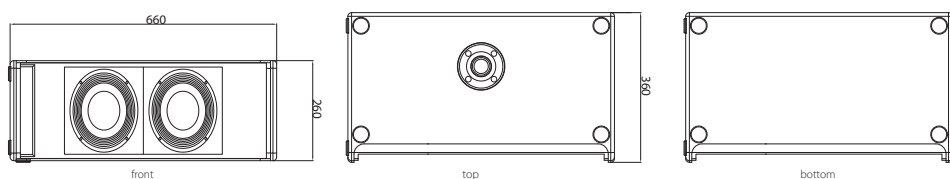

For more product
info and downloads
visit our website

