

Jet Wash19

19x20W RGBW moving wash light with 4°- 52° zoom

ORDER CODE: **JETWASH19**



The **Jet Wash19** is a compact and fast LED moving wash light with motorized zoom control. The 20W Osram RGBW LED source provides plenty of output and combined with a highly efficient optical system capable of zooming from 4° to 52°, this unit can easily work as beam or wash light. The **Jet Wash19**'s colour mixing system features precise and advanced control with superior white and saturated tones, and a clean and intuitive user interface similar to the other series.

MAIN FEATURES

- Compact form factor and fast movements
- Zoom from 4° to 52° with high optical efficiency
- Precise white CCT and colour mixing

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 19x20 W RGBW Osram Ostar LEDs
- Luminous flux: (4°) 3'019 lm - (52°) 5'337 lm @full
- Lux: (4°) 23'781 lx - (52°) 682 lx @5 m full
- Source life expectancy: > 50.000 h

OPTICS

- Zoom: 4° - 52° motorised linear zoom
- Lens type: honeycomb gapless plano-convex optics

COLOUR SYSTEM

- Colour mixing: RGBW / FC
- CCT: CCT control, + / - green correction, tungsten emulation
- White presets: 2.800 K ~ 10.000 K
- Colour wheel: virtual colour wheel with macros

DYNAMIC EFFECTS

- Control Resolution: 16-bit dimmer
- Special features: linear crossfade channel from any white to any colour; virtual CTO on colours

BODY

- Hardware on-board: sockets for quick-Lock Omega bracket (clamp not included)
- Pan angle: 540°
- Tilt angle: 233°
- Pan/Tilt resolution: bit 16-bit
- Feedback: automatic repositioning after accidental movement
- Body: aluminium structure with high-resistance polycarbonate cover
- Body colour: RAL 9004

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 23 channel
- RDM: RDM for remote monitoring and settings
- Display: LCD high resolution colour display with autoflip
- Firmware upgrade: yes, via USB - DMX interface (UPBOX2) not included

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -10° ~ +45°
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 350 W
- Output (at 230V): 7 units on a single power line
- Power factor: > 0,96

PHYSICAL

- IP rating: 20
- Cooling: forced air with fan
- Suspension and fixing: any position with quick-lock omega brackets
- Pan / tilt lock: for transportation and maintenance
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Data connection: Neutrik Art-Net RJ45 IN/OUT
- Power connection: Neutrik powerCON TRUE1 IN/OUT connectors
- Dimensions (WxHxD): 396x487x250 mm
- Weight: 14,7 kg

CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, UKCA, RCM


ACCESSORIES & RELATED PRODUCTS

- | | |
|------------------|---|
| ▪ 9513FXWL03 | Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m |
| ▪ 9533FXWL03 | Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FXW socket, L.3m |
| ▪ 958225L03 | 3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m |
| ▪ C6002B | Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black |
| ▪ FCLASTRAW19PIX | Flight case for 4 pcs of ASTRAWASH19PIX |
| ▪ RSR0630B | Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black |
| ▪ TOUR53415L03 | Dmx cable HC5340. CANS5MXX XLR 5p->CANS5FXX XLR (f) 5p, L.3m |

- | | |
|---------------|--|
| ▪ WSBBF1G5 | BlackBox F-1 G5 transmitter, 2,45GHz & 5.2/5,8 GHz, DMX/RDM, 512Ch |
| ▪ WSBBF1G6 | BlackBox F-1 G6 transrec, 512ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX |
| ▪ WSBBR512G5 | BlackBox R-512 G5 receiver 512Ch, 2.45GHz & 5.8GHz, DMX/RDM optional |
| ▪ WSBBR512G6 | BlackBox R-512 G6 receiver 512Ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX |
| ▪ ASTRAW19PEC | Egg Crate for ASTRAWASH19PIX |
| ▪ OS24 | Quick-lock omega bracket. |
| ▪ UPBOX2 | Firmware uploader kit, USB IN, 3-pin XLR DMX OUT |


PRESET FULL ON

Beam angle 50%: 4°

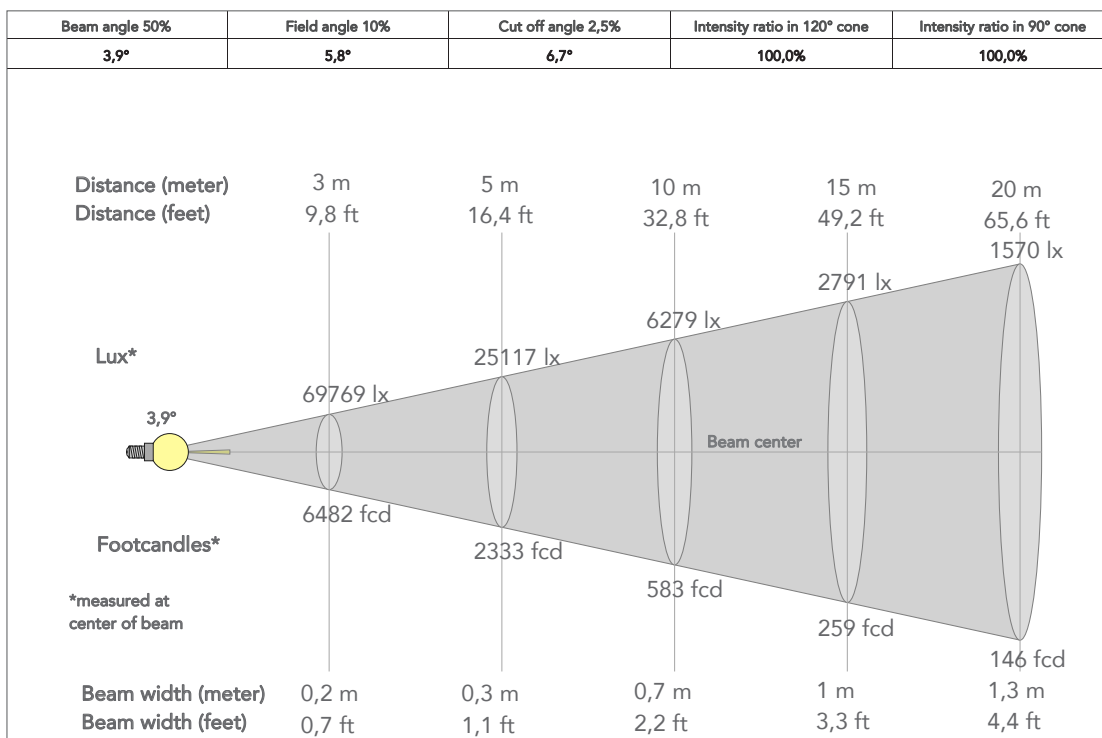


PRESET FULL ON

Beam angle 50%: 52°

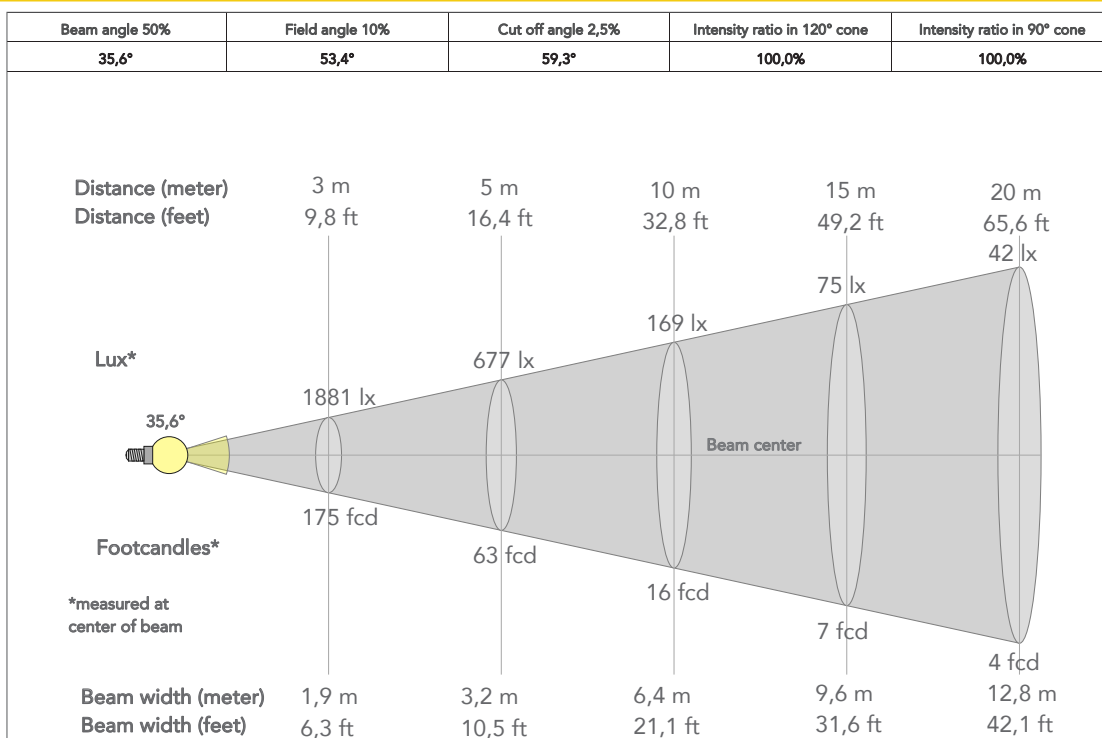

TECHNICAL DRAWINGS

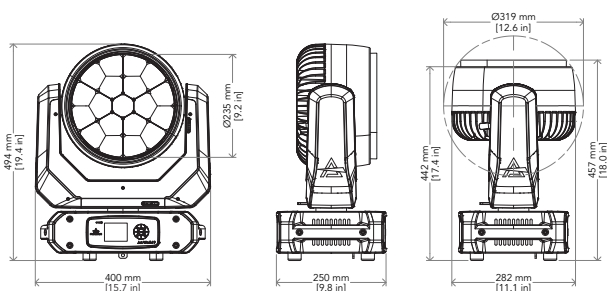

Visit our website
for specifications and
tech documentations

